

FPM-3121G

12.1" Industrial Monitor with Resistive Touchscreen, Direct-VGA, DVI and Wide Operating Temperature

NEW



Features

- 12.1" SVGA LED backlight LCD with low power consumption
- Robust anodized coated aluminum front bezel and stainless steel rear cover
- Supports wide operating temperatures
- Increase reliability by enhanced 5-wire resistive touch sensor
- Anti-reflective screen with tempered glass
- Full enclosure ground isolation protection
- Supports VGA/DVI input, dual touch interfaces and two power inputs
- Front lockable OSD membrane keys with user-defined brightness setting
- Front panel is NEMA4/IP65 compliant
- Supports panel, VESA, wall and desktop stand mounting

Introduction

The FPM-3121G is a particularly rugged and reliable 12.1" SVGA wide temperature industrial monitor for a variety of industry applications. Equipped with a hard anodized coating, stainless steel chassis, and -20 to 60° C operating temperature, it can satisfy demands in a wide range of harsh industrial applications. This model also features enhanced 5-wire resistive touch and system ground isolation protection to enhance the reliability. Lockable OSD keys on front panel with 2 user-defined contrast/brightness settings.

Specifications

General

- **Button Controls** OSD control pad on front side with lockable function
Two user-defined contrast/brightness settings
- **Certification** CE, FCC Class A, BSMI, CCC, UL
- **Dimension (W x H x D)** 312 x 244 x 60 mm (12.28" x 9.61" x 2.36")
- **Enclosure** Front panel: Aluminum with hard anodized coating
Rear cover: Stainless steel chassis
Ground Isolation Protection
- **Mounting** Panel, VESA arm, or wall & desktop mount with optional mounting kit
- **Power Input** Phoenix Jack: 24 V_{DC} input
DC Jack: external 57 W power adapter, with 100 ~ 240 V_{AC} input and +12 V_{DC} @ 4.75 A output
- **Power Consumption** 9 W
- **Video Port** VGA & DVI-D Port
- **Weight (Net)** 4.07 kg (8.975 lbs)

LCD Display

- **Display Type** SVGA TFT LCD (XGA optional)
- **Backlight Type** LED
- **Display Size** 12.1"
- **Max. Resolution** 800 x 600 (1024 x 768 optional)
- **Max. Color** 16.2M (RGB 8-bit) or 262k colors (RGB 6-bit)
- **Viewing Angle (H/V°)** 160 / 140 (160 / 160 optional)
- **Luminance (cd/m²)** 450 (500 optional)
- **Operation Life (hrs)** 50,000
- **Contrast Ratio** 700:1

Touchscreen (Optional)

- **Sensor** AMT
- **Driver** Penmount 6000
- **Type** 5-wire Resistive with enhanced ITO film
- **Interface** USB & RS-232 (Combo)
- **Lifespan** 36 million with a silicone rubber of R8 finger, writing rate is by 250g at 2 times/s
- **Light Transmission** > 80%
- **OS Support** Windows 2000, XP, Vista, 7, XPe, CE and Linux
- **Power Consumption** +5 V @ 100 mA
- **Touch Resolution** Linearity

Environment


- **Operation Temperature** -20 ~ 60° C (-4 ~ 140° F)
- **Storage Temperature** -30 ~ 80° C (-22 ~ 176° F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** Front panel is NEMA4/IP65 compliant
- **Shock** 11ms, 10G (Non Operating, Half Sine Wave)
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

Ordering Information

- **FPM-3121G-X0AE** 12.1" SVGA Ind. Monitor with Wide Temp
- **FPM-3121G-R3AE** 12.1" SVGA Ind. Monitor w/ Wide Temp, Resistive TS
- **FPM-3121SR-R3AE** 12.1" SVGA Ind. Monitor w/ Sunlight Readable Display
- **FPM3121GR3A1101E-T** 12.1" XGA Ind. Monitor with Wide Temp, Resistive TS

Dimensions

Unit: mm

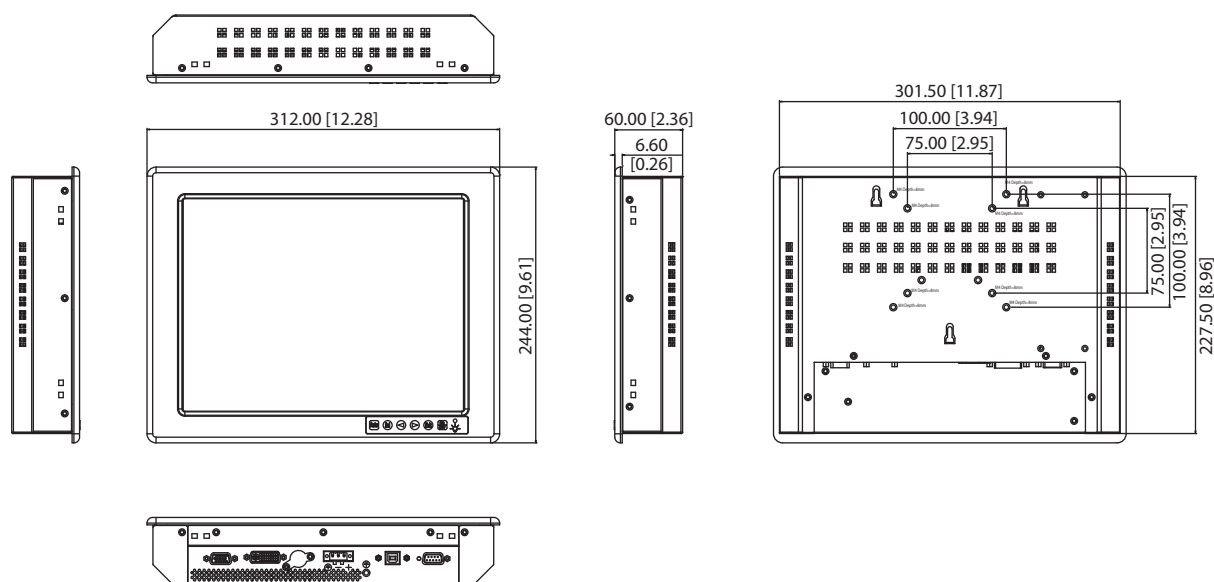


Panel Cut-out Dimensions: 303.5 x 229.5 mm (11.95" x 9.04")

Accessories

- **FPM-2150G-SMKE** Mounting kit for desktop stand & wall
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable UK Plug 1.8 M
- **1702031801** Power Cable EU Plug 1.8 M
- **1702031836** Power Cable China/Australia Plug 1.8 M

I/O View

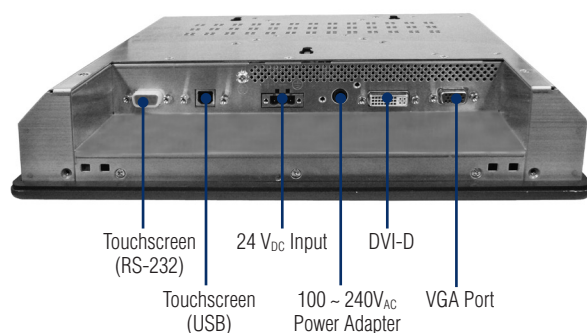

Mounting Method

