

AWS-8259

15" XGA TFT LCD Industrial Workstation with 9 x ISA/PCI/PICMG Slots, Passive Backplane and Membrane Keypad



Features

- 9-slot, 15" TFT LCD workstation
- Resolution: 1024 x 768
- Two-piece design: integrated or separated LCD panel & control chassis
- Built-in touchpad, USB port on front panel
- Designed for simple maintenance with hinged rear door for easy access
- Vibration protection up to 1G
- IP65/NEMA 4, Aluminum front panel and stainless steel chassis
- Hard anodic coating to prevent panel abrasion and acid corrosion

Introduction

AWS-8259 is an industrial workstation with 9-slot expansion capability. Featuring a 15" detachable display module, the AWS-8259 has a rugged yet flexible design for factory floor applications. Its 15" high-brightness 1024 x 768 LCD fulfills the needs for large information viewing. In addition, the display module can be easily separated for maintenance.

With waterproof character keypads & touchpad features, an additional keyboard or mouse is not needed for operation. The standard 8U size can easily be installed in either racks or mounted in panels.

Specifications

General

- **Button Controls**
 - Membrane Keypad 1 39 operating keys
 - Membrane Keypad 2 10 function keys
 - OSD 10 programmable macro function keys
 - Touchpad On front panel with backlight on/off switch
- **Certifications** BSMI, CE, CCC, and FCC class A
- **Connectors** 1 x front-accessible 6-pin PS/2 with dust-protection door for keyboard
- **Cooling System** 1 x 86 CFM fan
- **Dimensions (W x H x D)** 482 x 356 x 229 mm (18.98" x 14.0" x 9")
- **Enclosure** Aluminum
- **Disk Drive Bay** Supports one 3.5" HDD & one slim CD-ROM (HDD and CD-ROM optional)
- **LED Indicators** Power on/off and HDD activity
- **Mounting** 19" rack
- **Power Input**

Model Name	Watt	Input	Output	MTBF	Safety
PS-300ATX-ZB	300 W	90 ~ 264 V _{AC} @ 47 ~ 63 Hz full range 6.0/3.0 A	+5 V @ 30 A +12 V @ 15 A +3.3 V @ 28 A -5 V @ 0.3 A -12 V @ 0.8 A +5 VSB @ 2 A	100,000 hrs	UL/cUL/TUV/ Nemko/FCC/CE EN61000-3-2 Class D/CB/CCC

- **Weight (Net/ Gross)** 18.5 kg (40.79lbs)/20 kg (44.09lbs)

Backplane Options

- **PCA-6109P4** 4 PCI, 4 ISA, 1 CPU slot backplane

LCD Display

- **Backlight Life** 50,000 hours
- **Display Size** 15"
- **Display Type** XGA TFT LCD
- **Luminance** 350 cd/m²
- **Max. Colors** 262K
- **Max. Resolution** 1024 x 768
- **Viewing Angle (H/V°)** 160/130


Touchscreen (Optional)

- **Interface** RS-232
- **Lifespan** 1 million touches at a single point
- **Light Transmission** 75 %
- **OS Support** MS-DOS, Windows 95/98/NT/2000/XP
- **Power Consumption** +5 V @ 200 mA
- **Resolution** 1024 x 1024
- **Type** 8-wire, analog resistive

Environment

- **Humidity** 5 ~ 85% RH @ 40° C, non-condensing
- **Humidity (Storage)** 5 ~ 95% non-condensing
- **Ingress Protection** Front panel: NEMA4, IP65
- **Operating Temperature** 0 ~ 50° C (32 ~ 122° F)
- **Storage Temperature** -20 ~ 60° C

Dimensions

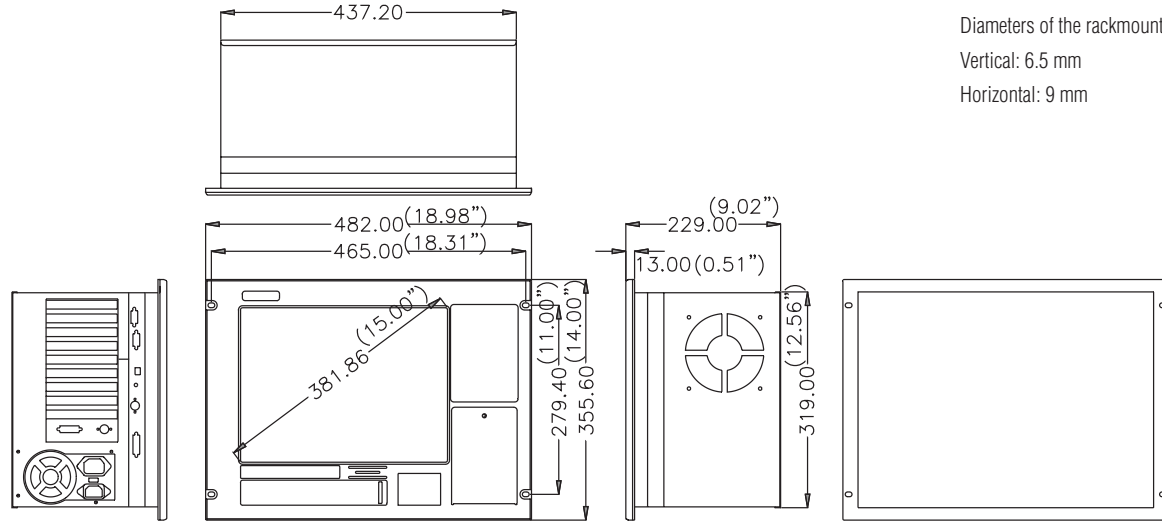

Cut-out dimensions (W x H): 449 x 336 mm

Ordering Information

- **AWS-8259TP-XAE** 15" B/P Ind. Workstation with 9 slots
- **AWS-8259TP-RAE** 15" B/P Ind. Workstation with 9 slots and TS

CPU Card Suggestions

Part No	CPU Grade	Description
PCA-6186VE-00B1	Intel Pentium 4 (400/533 MHz FSB)	Socket 478 Pentium 4/Celeron processor card with VGA/LAN/HISA
PCA-6186LV-00B1	Intel Pentium 4 (400/533 MHz FSB)	Socket 478 Pentium 4/Celeron processor card with VGA/HISA
PCA-6003VE-00A1	Intel Pentium III (133 MHz FSB)	Socket 370 Pentium/Celeron processor card with VGA/LAN

Back View



Side View

