

# 80 KEY COMPACT TRACKERBOARD

Short travel keyboard with 38mm trackball

The KSTM80 keyboard uses short travel switches with low pressure and positive tactile feedback for convenient data entry. In spite of its compact dimensions, this keyboard emulates all major key functions of a large multifunctional keyboard thanks to its "Fn" key mapping. The integrated and industry proven 38mm trackball warrants for a comfortable and accurate control over the cursor. Units are available as front panel mount versions and have PS/2 or USB compatible outputs.



## Panel mount version

Ease of mounting into the users' panel or cabinet by means of twelve M3-threaded studs while the added silicon sponge assures the sealing.

KSTM80Fxxyy  
dim : 325 x 142 x 25 mm  
weight : 0,8 kg



## Enclosed version

KSTM80Sxxyy  
dim : 347 x 163 x 35 mm  
weight : 1,5 kg

## • FEATURES AND TECHNICAL DATA

Switches with travel of 0,3mm and with pressure of 2,55 N  
Positive tactile feedback and key embossing  
Optimum legend colour scheme and contrast  
Compact layout with availability of all major keys  
Separate numeric keypad access via "Fn" key

Industry proven 38mm trackball with black epoxy ball  
Polyester overlay , scratch and chemical resistant  
Sealing : IP67 for the keyboard part, IP65 static for the trackball  
Operating temperature range : -10°C to +55°C

## • CONNECTIVITY

The keyboard has two 1,6 meter shielded cables ended by a PS/2 plug or one cable with USB type A plug. Use the drivers as standard available in your operating system.

## • ORDERING INFO

<b>KSTM80 F xx yyy</b>	Panel mount version	xx = specify layout version : 1 = US Qwerty layout	yyy = protocol output : PS2 = PS/2 output USB = USB output
<b>KSTM80 S xx yyy</b>	Enclosed version		


example : KSTM80F + 1 + USB = KSTM80F1USB  
= 80 key keyboard with trackball, panel mount version, US Qwerty layout with USB output

# 80 KEY SHORT TRAVEL KEYBOARD

## • DIMENSIONAL DRAWING

Panel mount

Dim in mm

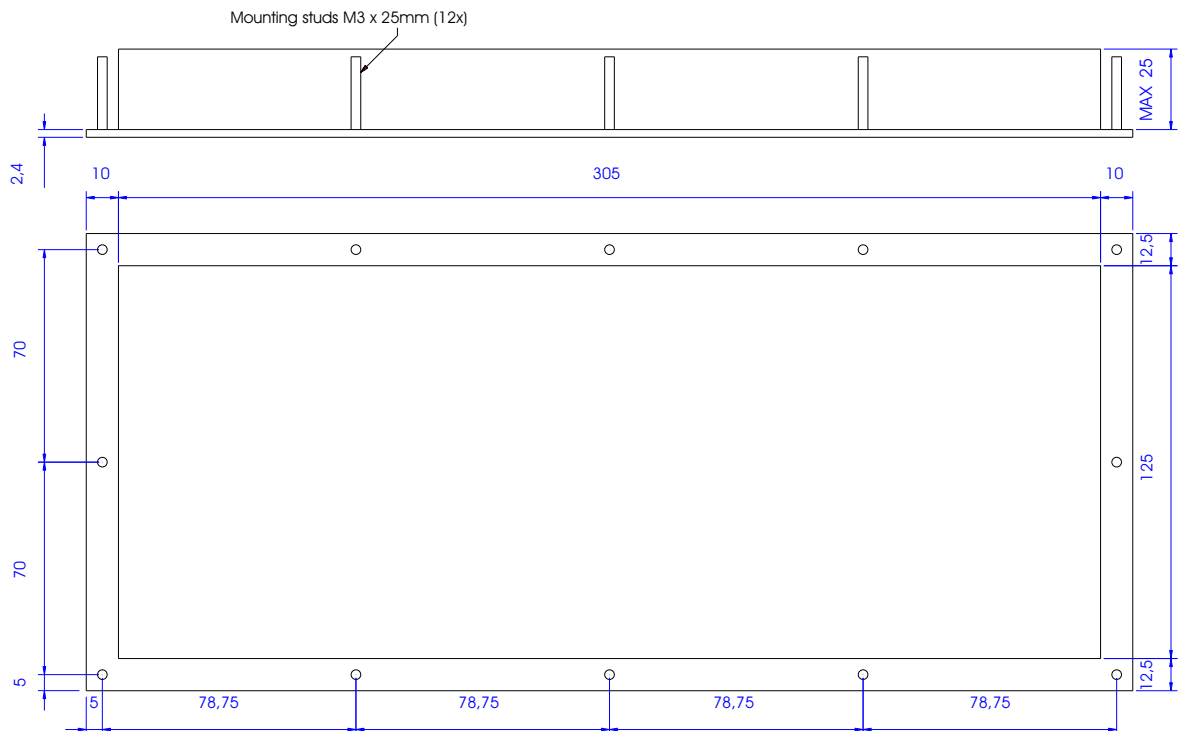

Colour description front:	
	RAL 7035 light grey
	RAL 9010 true white
	RAL 5003 sapphire blue
	RAL 2011 deep orange
Colour description enclosure	
	RAL 7035 light grey



NSI bvba, Haakstraat 1A, B-3740 Bilzen, Belgium  
 Tel. : ++32 (0) 89 51 90 00 Website : www.nsi-be.com  
 Fax : ++32 (0) 89 51 90 09 E-mail : info@nsi-be.com