


PCI-1602UP PCI-1604UP PCI-1610UP/AUP

2-port RS-422/485 Low-Profile PCI Communication Card with Isolation and EFT Protection

2-port RS-232 Low-Profile PCI Communication Card with EFT Protection

4-port RS-232 Low-Profile Universal PCI Communication Card with EFT Protection

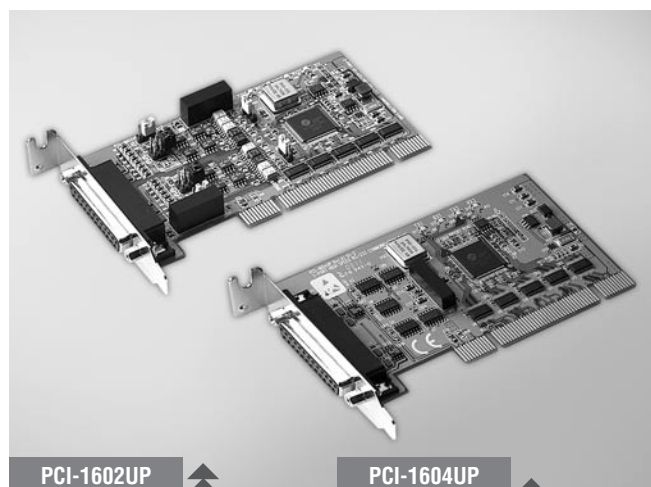

PCI-1602UP

PCI-1604UP



Features

- PCI bus 2.2 compliant
- Speeds up to 921.6 kbps
- 2-port RS-232 (PCI-1604UP); 2-port RS-422/485 (PCI-1602UP); 4-port RS-232 (PCI-1610UP)
- I/O address automatically assigned by PCI Plug & Play
- OS support: Windows® 98/ME/2000/XP/XP Embedded/Vista, Windows CE 5.0/6.0, Linux
- 2,500V_{DC} EFT Protection
- 2,500V_{DC} Isolation protection for RS-422/485 (PCI-1602UP)
- Interrupt status register for increased performance
- Space reserved for termination resistors (PCI-1602UP)
- Automatic RS-485 data flow control (PCI-1602UP)
- Powerful and easy-to-use utility (ICOM Tools)
- Universal and Low-profile PCI (Supports 3.3 V or 5 V PCI bus signal)

Introduction

These RS-232/422/485 PCI communication cards are compatible with the PCI 2.2 bus specification for universal connectivity and low profile PCI cards. PCI-1604UP provides two independent RS-232 ports, while PCI-1602UP has two RS-422/485 ports. PCI-1610UP and PCI-1610AUP provide 4 RS-232 ports. To improve system performance, all cards allow transmission rates up to 921.6 kbps. To increase reliability, the cards offer EFT protection, protecting your system from abrupt high voltages up to 2,500 V_{DC}. High-performance 16PC1952 and 16PC1954 UARTs with 128-byte FIFO, reduces the CPU load, making the cards especially suitable for multitasking environments.

The cards follow the Low Profile PCI MD1 standard. This standard has the same protocol and electronic definition as standard PCI, but the Low Profile PCI standard is smaller. Thus, the cards are suitable for embedded systems, and size-constrained environments. Moreover, all cards are equipped with an universal PCI connector, which allows support for traditional systems with 5 V signaling or newer systems with 3.3 V signaling.

Specifications

General

- **Bus Type** Universal PCI V 2.2
- **Certifications** CE, FCC class A
- **Connectors** PCI-1610UP: 1 x Female DB44
PCI-1602UP and PCI-1604UP: 1 x Female DB25
- **Dimensions** 119.91 x 64.41 mm (4.7" x 2.5") (Low profile MD1)
- **Power Consumption** 5 V @ 400 mA (Max.)
- **Power Requirement** 5 V

Communications

- **Communication** PCI-1602UP, PCI-1604UP: 16PC1952 Controller
PCI-1610UP: 16PC1954
- **Data Bits** 5, 6, 7, 8
- **Data Signals** RS-232: Tx+, Tx-, Rx+, Rx-, RTS+, RTS-, CTS+, CTS-, RI
RS-422: Tx+, Tx-, Rx+, Rx-, RTS+, RTS-, CTS+, CTS-, GND
RS-485: Data+, Data-, GND
- **FIFO** 128 bytes
- **Flow Control** CTS/RTS, Xon/Xoff
- **IRQ** Assigned by Plug & Play
- **Parity** None, even, odd
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2

Protection

- **ESD Protection** 16 kV
- **Isolation Protection** 2,500 V_{DC} (PCI-1602UP)
- **EFT Protection** 2,500 V_{DC} (PCI-1602UP, PCI-1604UP, PCI-1610UP)

Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows 98/ME/2000/XP/XP Embedded, Windows CE 5.0/6.0, Linux

Environment

- **Humidity (Operating)** 5 ~ 95 % RH, non-condensing (refer to IEC 68-2-3)
- **Operating Temperature** 0 ~ 65° C (refer to IEC 68-2-1, 2) (32 ~ 149° F)
- **Storage Temperature** -25 ~ 85° C (-13 ~ 185° F)

Ordering Information

- **PCI-1602UP** 2-port RS-422/485 Low-Profile Uni PCI Comm Card
- **PCI-1604UP** 2-port RS-232 Low-Profile Uni PCI Comm Card
- **PCI-1610UP** 4-port RS-232 Low-Profile Uni PCI Comm w/EFT
- **PCI-1610AUP** 4-port RS-232 Low-Profile Uni PCI Comm Card

Note: 30 cm DB25 to 2 x DB9 or 30 cm DB44 to 4 x DB9 cable included