

PPC-174T

17" Panel PC with Intel® Pentium® 4 Processor



Features

- 17" TFT SXGA LCD
- Intel® Pentium® 4 CPU up to 3.06 GHz
- System memory up to 2 GB DDR SDRAM
- Built-in CD-ROM drive/speakers
- Rugged die-cast aluminum housing with removable plastic front bezel
- Removable 3.5" HDD bay, 2.5" SATA HDD is available, but converter board needed
- Resistive, capacitive, SAW and infrared touchscreens are available

Introduction


PPC-174T is a top performing and highly expandable panel PC. Equipped with a 17" Color TFT LCD, it features high performance, multimedia devices, connectors, and 2 PCI sockets for high expansion capacity. Because of its multifunctional design, the PPC-174T meets demands from multimedia applications and interactive kiosks that require big displays and more powerful computing performance.

Specifications

Processor System	CPU	Supports Socket 478 based Pentium 4 CPU up to 3.06 GHz
	Disk Drive Housing	Removable 3.5" HDD bay, 2.5" SATA HDD is available, but converter board needed
	Dimensions (W x H x D)	446 x 382 x 127 mm (17.56" x 15.04" x 5")
	Weight	10 kg (22 lb)
	Front Panel Protection	IP65/NEMA 4 compliant (not for SAW model)
	HDD	Uses 4-pin jumper with HDD IDE board
	CD-ROM Drive (Default)	Compact 24X or above, Built-in 1 x 24X slim type CD-ROM
	DVD+/-RW Drive (optional)	Optional 8X or above (IDE slim type)
	Combo Drive (Optional)	Optional DVD/CD-RW 8D/24W/24E/24R or above (IDE slim type)
	Memory	Supports up to 2 GB DDR 333 SDRAM (184-pin)
I/O ports	Network (LAN)	10/100 Mbps Ethernet interface (Gigabit optional)
	I/O ports	- 3 x serial ports: 2 x RS-232, 1 x RS-232/422/485 - Parallel ports: 4 x USB 2.0 port - 2 x PCMCIA Type II - PS/2 mouse and keyboard interface - Mic-in, Line-in, Line-out, and game ports - S-Video port
Environmental Specifications	Bus Expansion	2 x PCI expansion slots, 1 x Mini PCI card
	Operating Temperature	0 ~ 45° C (32 ~ 113° F)
	Relative Humidity	10 ~ 95% @ 40° C, non-condensing
	Shock	10 G peak acceleration (11 msec. duration)
	EMC	BSMI, VCCI, CE, FCC Class B, CCC
	Safety	CB, CE, UL
	Types	Analog Resistive
Touchscreen (Optional)	Resolution	2048 x 2048
	Light Transmission	75%
	Controller	RS-232 interface
	Power Consumption	+5 V @ 200 mA
	Software Driver	Supports both DOS and Windows
LCD Display	Display Type	Color TFT LCD
	Size (Diagonal)	17"
	Max. Resolution	1280 x 1024
	Max. Colors or Grayscale	16.7M
	Pixel Pitch (mm)	0.264 x 0.264
	Luminance (cd/m2)	300
	Contrast Ratio	800:1
	Viewing Angle	80° (left), 80° (right), 80° (up), 80° (down)
	Operating Temperature	0 ~ 50° C
	VR Controls	Brightness
Power Supply	Simultaneous Mode	Yes
	LCD MTBF	50,000 hrs
	Output Rating	180 W (max.)
	Input Voltage	100 ~ 240 VAC @ 50 ~ 60Hz
	Output Voltage	+3.3 V @ 16.8 A, +5 V @ 12 A, +12 V @ 10 A, -12 V @ 0.8 A, +5 Vsb @ 2 A

Dimensions

Unit: mm

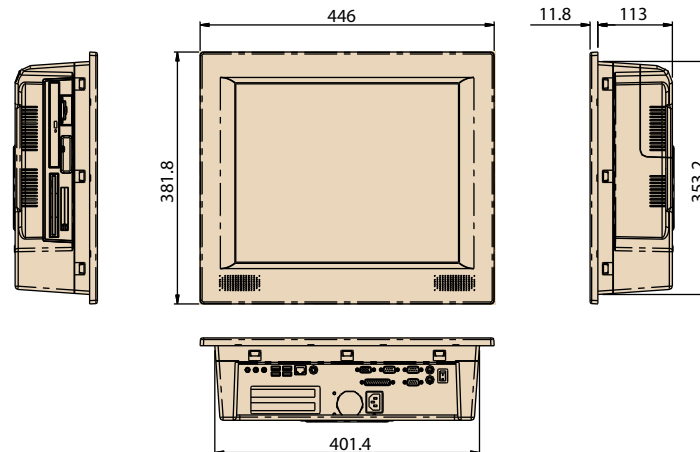


Ordering Information

Part No.	Description
PPC-174T-BAREE	Panel PC with 17" TFT LCD display (resolution: 1280 x 1024)
PPC-174T-BARE-TE	PPC-174T with resistive touchscreen
PPC-174 Stand	Stand kit for PPC series
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-174 RACK-MT	19" Rack Mounting kit for PPC-174 (9U)
1702002600	Power Cable UL/CSA (USA) 180D 125V10A 1.83M
1702002605	Power Cable 90D 220V EUROPEAN 250V/6A 1.8M
989K017401E	2.5" SATA HDD DRAWER FOR PPC-174T

* Intel Pentium 4 CPU, DDR SDRAM and 3.5" HDD are available as optional items.

I/O Appearance

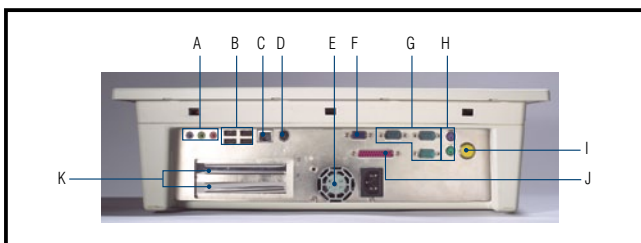

- | | |
|---------------------------------------|--------------------------|
| A. Line-in/Line-out/Mic-in | G. COM port x 3 |
| B. USB 2.0 x 4 | H. PS/2 mouse & keyboard |
| C. 10/100 Ethernet (Gigabit optional) | I. Power switch |
| D. S-Video | J. Parallel port |
| E. ATX power supply | K. PCI slot x 2 |
| F. VGA port | |

Feature Details

Protection

The PPC-174T is robust enough to withstand harsh environments on factory floors and in an external environment. The die-cast housing also acts as a heat sink to prevent the system from overheating.

Networking

Three serial ports and a 10/100 Mbps Ethernet port (Gigabit optional) give the PPC-174T advanced networking capabilities and provide the best solution for versatile applications.

Expansion

To extend its functionality, the PPC-174T is designed with two expansion slots for PCI cards, one Mini PCI slot, four USB 2.0 (Universal Serial Bus) ports, and one S-Video port, a 6-in-1 cardreader interface, and one PCMCIA card bus (Type II x 2). With these expansion capabilities, the PPC-174T not only functions as an HMI, but also as a computing center around which to build your application.

Removable 3.5" HDD Bay

A 3.5" HDD is more reliable and cost-effective than a 2.5" HDD. The PPC-174T's 3.5" removable HDD drive bay provides great performance, and can be easily maintained.

Touchscreen Options

Customers can choose from three optional types of standardized touchscreens: resistive, capacitive and SAW (Surface Acoustic Wave). These options make the PPC-174T a more user-friendly interface for different environments.



Removable 3.5" HDD Bay