TPC-1840WP

18.5" WXGA TFT LCD Multi-Touch **Panel Computer with AMD Dual-core processor**



2013



Features

- 18.5" WXGA TFT LED LCD display
- AMD dual-core T56E 1.65GHz with external APU, advanced graphical performance
- 16:9 wide screen with PCT multi-touch •
- Built-in function and home key button used for intuitive UI
- Anti-scratch surface: 7H hardness
- Easy Maintenance of Cfast/HDD/Mini-PCIe components by opening side covér
- Support Mini-PCle expansion slot
- Support HDMI for second display application
- HD Audio supports for alarm application
- Front LED indicator to show operating status
- IP65 compliant true flat screen
- Compact design with Die-cast Magnesium alloy front bezel
- Fanless cooling system Winner of the 2013 iF product design award

Introduction

With brand-new ID design, TPC-1840WP series provide high resolution 18.5" display and PCT multi-touch in 16:9 wide format. By embedding AMD T56E 1.65GHz processor with external APU, TPC-1840WP can support advanced graphical performance in more complex applications. Built-in function and home key button for greater user usability and operating safety. TPC-1840WP series also support mini-PCIe slot for communication function expansion. The opening side cover is designed for easy maintenance of Cfast/HDD/ Mini-PCIe components.

Specifications

General


General		LCD Display	
BIOS	AMI 32Mbit	 Display Type 	WXGA TFT LED LCD
 Certifications 	BSMI, CCC, CE, FCC Class A, UL	 Display Size 	18.5"
 Cooling System 	Fanless design	Max. Resolution	1366 x 768
 Dimensions (W x H x D) 488.1 x 309.1 x 56.7 (19.2" x 12.2" x 2.2")	 Max. Colors 	16.7 M
 Enclosure 	Front bezel: Die-cast Magnesium alloy	 Luminance cd/m² 	300
	Back housing: PC/ABS Resin	 Viewing Angle (H/V°) 	170/160
 Mounting 	Panel Mount	 Backlight Life 	50,000 hrs
 OS Support 	Microsoft [®] Win8/WES7P/XP/WES2009/WinCE 6.0/ Linux	 Contrast Ratio 	1000:1
 Power Consumption 	35 W Typical	Touchscreen	
 Power Input 	18 ~ 32 V _{DC}	 Light Transmission 	≥88%
 Watchdog Timer 	1 ~ 255 sec (system)	 Resolution 	4096*4096 dot
 Weight (Net) 	7kg (15.44 lbs)	■ Туре	Projected capacitive / 5-wire analog resistive (optional)
System Hardware		Environment	
- CPU	AMD G-series T56E 1.65GHz	- Humidity	10 ~ 95% RH @ 40°C, non-condensing
 Chipset 	AMD A50M FCH	•	Note: Tested for 48hrs
 Memory 	4GB SO-DIMM DDR3 SDRAM	Ingress Protection	Front panel: IP65
- LAN	10/100/1000Base-T x 2	 Operating Temperature 	0 ~ 50°C (32 ~ 122°F)
Expansion Slots	Full-sized Mini PCI-E x 1	 Storage Temperature 	-20~60°C (-4~140°F)
 Storage 	CFast slot x 1 2.5" SATA HDD x 1(optional)	 Vibration Protection 	With HDD: 1 Grms (5 ~ 500 Hz) (Operating, random vibration)
• I/O	RS-232 x 3 RS-422 / 485 x1 USB 2.0 x 2(Host)		

AD\ANTECH **Automation Panel PCs**

HDMI x 1

Mic in x 1, Line out x 1

TPC-1840WP

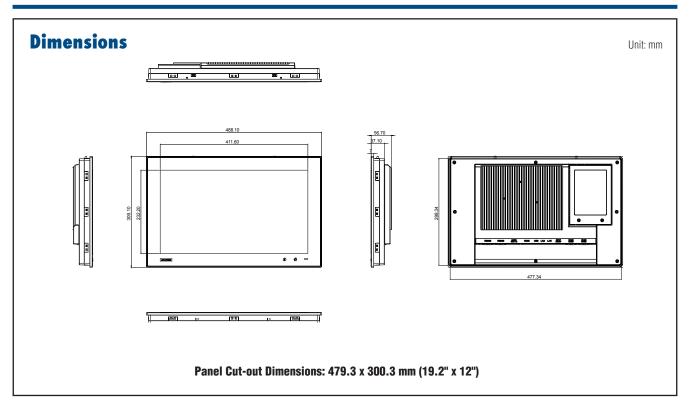

Ordering Information

• TPC-1840WP-T3AE 18.5" WXGA Multi-Touch Panel PC, AMD T56E, 4GB

Accessories

- 1757003463
- 1700001524
- PWR-247-AE1702002605
- 50W DC 24V/2.3A Output Power Supply Power cable EU Plug 1.8M
- 1702031801 Power cable UK Plug 1.8M
- 1702031836
- Power cable China/Australia Plug 1.8M

Power Cord 3P UL 10A 125V 1.8M

100-240V_{AC} to $19V_{DC}$ 90W Power Adapter

Rear View

