

AX61622

6U 20-slot Rackmount Chassis




Features

- 6U-high 20-slot rackmount chassis
- Supports hot-swap redundant power supply
- Internal four 5.25" HDD drive bays
- Easy to replace fan filter by hand
- Up to 4 systems in a chassis



Front View

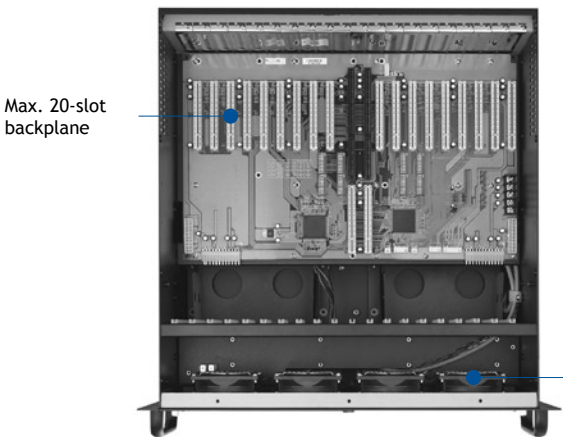

Top View



Rear View

Specifications

Standard Color	Black
Drive Capacity	Exposed 4 x 5.25" HDD drive bay, 2 x 3.5" HDD drive bay
Cooling	4 x 9 cm ball-bearing fan (38.6 CFM/each) with a removable filter
System Board	SBCs
Expansion Interface	20-slot backplane
Operating Temperature Range	0° C ~ 45° C (32° F ~ 113° F)
Dimensions	482.6 mm (19") (W) x 462 mm (18") (D) x 266 mm (10.5") (H)
Weight (net/gross)	17 kg (37.48 lb)/18.3 kg (40.34 lb)

Power Supply Specifications

Items	Watt	Specifications		MTBF
		Input	Output	
PS300-XP2	ATX 300W (PFC)	Slide Switch (115V _{AC} /230V _{AC})	+5V @ 30/21.5A +12V @ 15A -12V @ 0.8A +3.3V @ 15/28A +5V _{SB} @ 2A -5V @ 0.3A	100,000 hours
PS400-XP2	ATX 400W (PFC)	AC 90-264V (Auto)	+5V @ 20A +3.3V @ 20A +12V1 @ 16A +12V2 @ 16A -12V @ 0.5A +5V _{SB} @ 2.5A	100,000 hours
PS500-XP2	ATX 500W (PFC)	AC 90-264V (Auto)	+5V @ 24A +3.3V @ 24A +12V @ 34A +12V1 @ 17A +12V2 @ 17A -12V @ 0.8A +5V _{SB} @ 2.5A	100,000 hours
RPS460-HRP	ATX 460W HRP (PFC)	AC 100-240V (Auto)	+5V @ 40A +12V @ 32A -5V @ 0.8A -12V @ 1A +3.3V @ 30A +5V _{SB} @ 2A	100,000 hours

Backplane Options

Models	Slots per Segment (ISA/PCI/CPU)	Segment
ATX6022/20G	7/12/1	Single
ATX6022/20GP18	1/18/1	Single
ATX6022/20Q	1/3/1	Quad

Ordering Information

AX61622TB/X400	20-slot version, with ATX 400W power supply
AX61622TB/X500	20-slot version, with ATX 500W power supply
AX61622TB/X460R	20-slot version, with ATX 460W redundant power supply

* Specifications and certifications are limited to optional.

** T-Black color

Dimensions

